

The PE pipe spreader bar (V-SB-4/5)

Accessory for all ELiTE models


- SWL of 4000kg & 5000kg

Applications:

- PE/ PU long pipe handling

Pipe Lengths

- 18m up to 24m

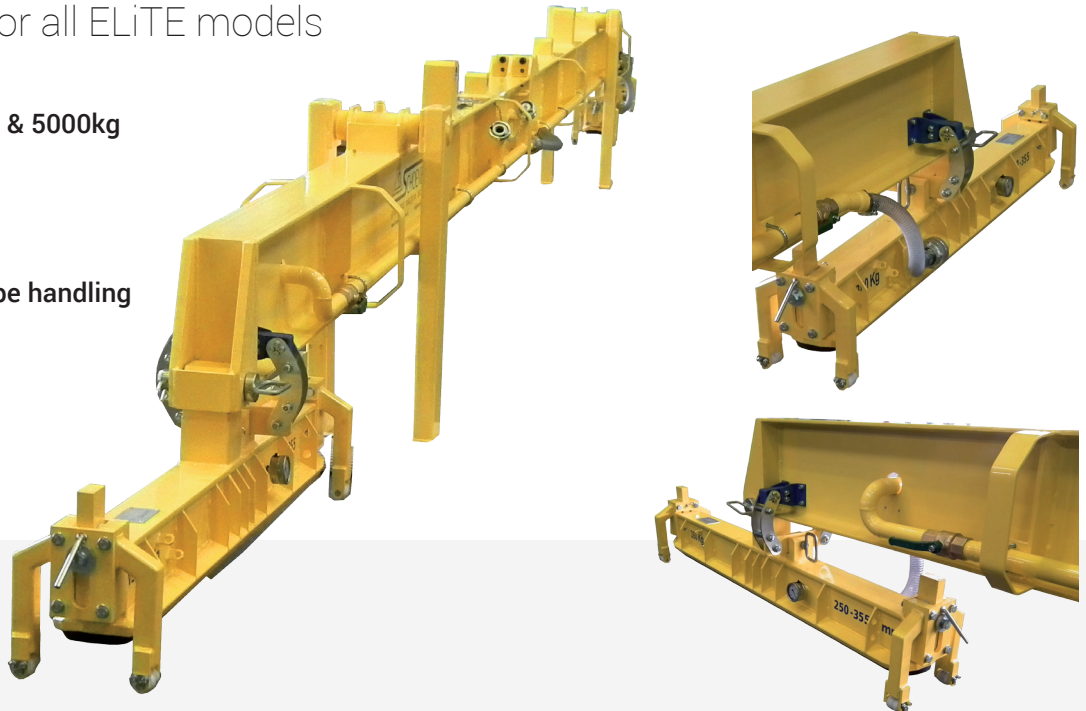

- Split 2 pcs main carrier frame
- Support legs (lockable/ fold away)
- 8 steel struts along each side of the beam
- Steel flange joining the above
- 4 topside connecting lugs for ELiTE models
- Vacuum steel piping running from central to outer far end positions of main carrier frame
- 2 vacuum lock-off taps/ levers for each suction pad
- Transparent UV resistant, steel spiral coiled protected vacuum hosing connecting steel piping
- 2 vacuum in- ports couplings for large and small ELiTE models
- 1 vacuum end cap for vacant vacuum in- port.
- 2 Transparent UV resistant, steel spiral coiled protected vacuum hosing connecting steel piping to suction pads
- 2 Vacuum pad couplings
- 2 steel pins for suction connecting
- 2 steel SWL plates/ laser cut indicating exact SWL
- Pad swivel mechanism

Length: 9140 mm
Width: 390 mm
Height: 520 mm (legs folded for lift / without suction pads)
Net weight: 635 kg (without suction pads)